




Outdoor Weathering Test Results on Material used to Produce SolaTuf[®] Acrylic Film

Luminous Transmittance During Outdoor Exposure Testing

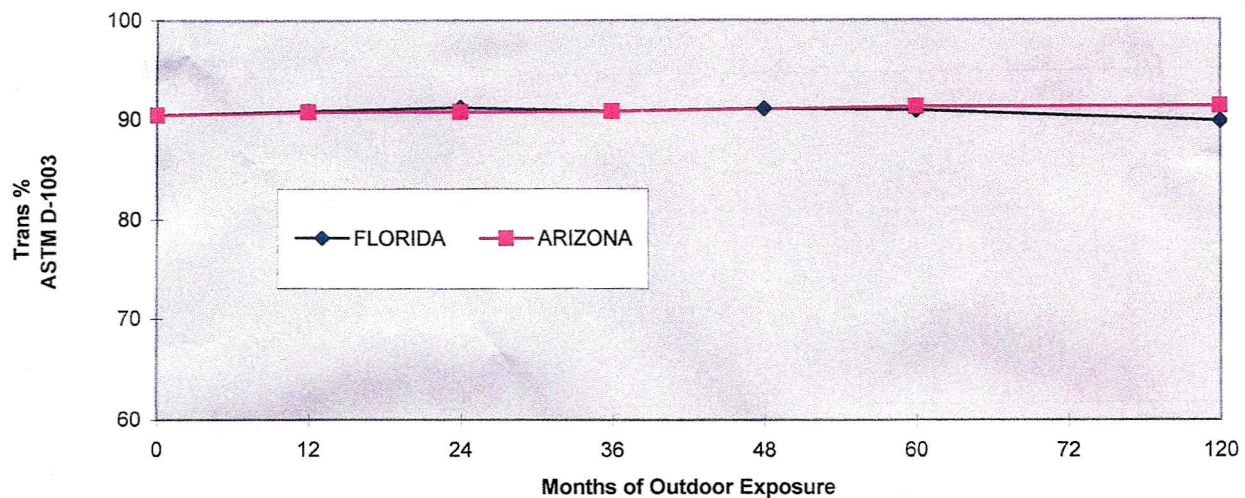

Optical Haze During Outdoor Exposure Testing

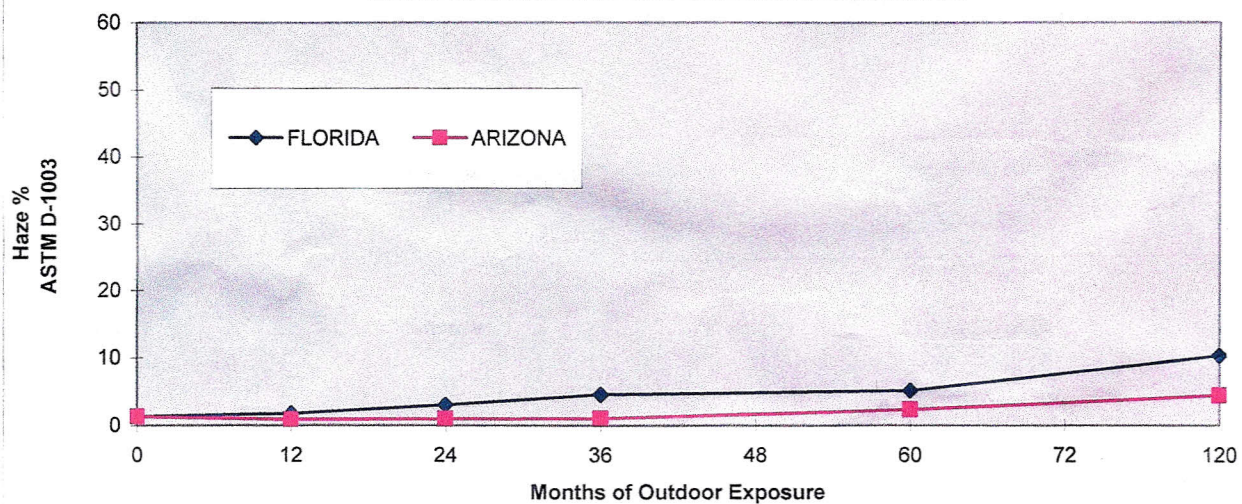

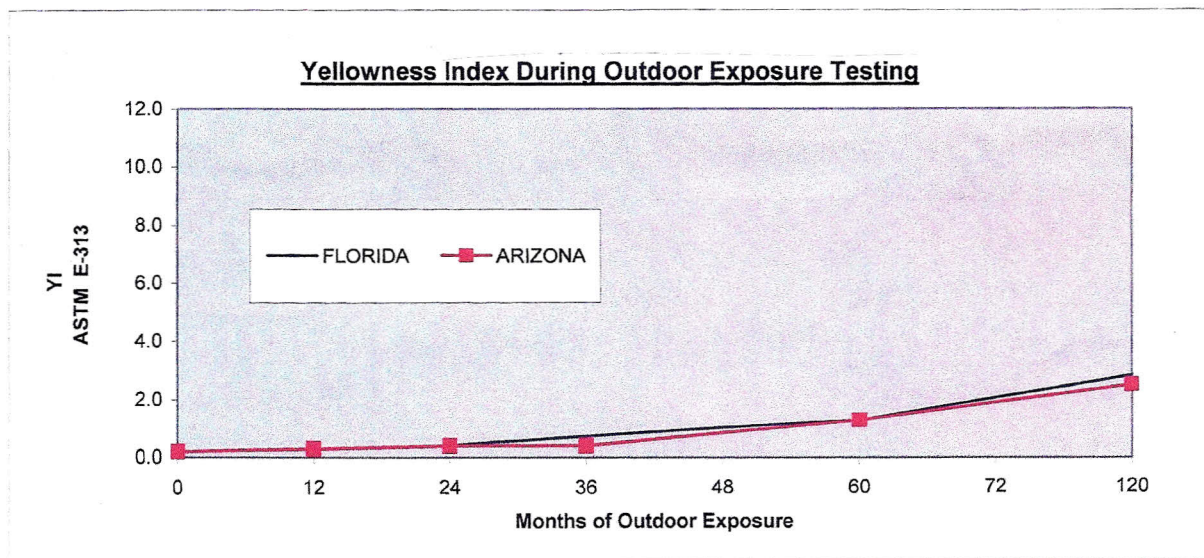

- Test specimens are 3.2 mm thick, smooth surface, injection molded plaques.
- Test specimens exposed @ 45° South, Open Rack.
- Test reference exposure# FL3962-10 and AR3962-10 conducted by Atlas DSET Laboratories.

PLEASE NOTE: Properties reported here are typical of average lots. Rowland Technologies, Inc. makes no representation that the material in any particular shipment will conform exactly to the values given herein nor is Rowland Technologies, Inc. responsible for the performance of this material for a given application. The user of the material should perform their own testing to determine the suitability of the material for the intended use. Applications depicted herein are not specifications. They are provided for information only.